

4

TECHNICAL REPORT BRL-TR-3091

BRL

AD-A220 215

A COMPARISON OF PARABOLIC AND
CIRCULAR ARC PREDICTION

JOSEPH K. WALD
HAROLD H. BURKE

MARCH 1990

SDTIC
ELECTE
APR 10 1990
COB D

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.

U.S. ARMY LABORATORY COMMAND

BALLISTIC RESEARCH LABORATORY
ABERDEEN PROVING GROUND, MARYLAND

90 04 00 060

DESTRUCTION NOTICE

Destroy this report when it is no longer needed. DO NOT return it to the originator.

Additional copies of this report may be obtained from the National Technical Information Service, U.S. Department of Commerce, 5285 Port Royal Road, Springfield, VA 22161.

The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The use of trade names or manufacturers' names in this report does not constitute indorsement of any commercial product.

UNCLASSIFIED

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE March 1990	3. REPORT TYPE AND DATES COVERED Final, 1 Sep 89 - 31 Oct 89		
4. TITLE AND SUBTITLE A Comparison of Parabolic and Circular Arc Prediction			5. FUNDING NUMBERS PR: 1L162618AH80 WU: DA30-6667	
6. AUTHOR(S) Wald, Joseph K. and Burke, Harold H. (USAMSAA)			8. PERFORMING ORGANIZATION REPORT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)				
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) US Army Ballistic Research Laboratory ATTN: SLCBR-DD-T Aberdeen Proving Ground, MD 21005-5066			10. SPONSORING / MONITORING AGENCY REPORT NUMBER BRL-TR-3091	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution unlimited			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) As opposed to the standard second order "parabolic" predictor, the Circular Arc Aimed Munition (CAAM) prediction concept accounts for the rotational motion of targets maneuvering in a circular arc. In this paper we present the results of a simulation study that investigated the difference in effectiveness between the CAAM predictor and a parabolic predictor, installed in a modern air defense gun, against a variety of flightpaths flown by maneuvering aircraft in actual field tests,				
14. SUBJECT TERMS Circular Arc Aimed Munition (CAAM); air defense gun systems; target prediction; fire control system; Modern Gun Effectiveness Model (MGEM); Monte Carlo; Library of Digitized Flightpaths			15. NUMBER OF PAGES 26	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED			18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	
19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED			20. LIMITATION OF ABSTRACT SAR	

NSN 7540-01-280-5500

UNCLASSIFIED

Standard Form 298 (Rev 2-89)
Prescribed by ANSI Std Z39-18
298-102

UNCLASSIFIED

GENERAL INSTRUCTIONS FOR COMPLETING SF 298

The Report Documentation Page (RDP) is used in announcing and cataloging reports. It is important that this information be consistent with the rest of the report, particularly the cover and title page. Instructions for filling in each block of the form follow. It is important to stay within the lines to meet optical scanning requirements.

Block 1. Agency Use Only (Leave blank).

Block 2. Report Date. Full publication date including day, month, and year, if available (e.g. 1 Jan 88). Must cite at least the year.

Block 3. Type of Report and Dates Covered. State whether report is interim, final, etc. If applicable, enter inclusive report dates (e.g. 10 Jun 87 - 30 Jun 88).

Block 4. Title and Subtitle. A title is taken from the part of the report that provides the most meaningful and complete information. When a report is prepared in more than one volume, repeat the primary title, add volume number, and include subtitle for the specific volume. On classified documents enter the title classification in parentheses.

Block 5. Funding Numbers. To include contract and grant numbers; may include program element number(s), project number(s), task number(s), and work unit number(s). Use the following labels:

C - Contract	PR - Project
G - Grant	TA - Task
PE - Program Element	WU - Work Unit Accession No.

Block 6. Author(s). Name(s) of person(s) responsible for writing the report, performing the research, or credited with the content of the report. If editor or compiler, this should follow the name(s).

Block 7. Performing Organization Name(s) and Address(es). Self-explanatory.

Block 8. Performing Organization Report Number. Enter the unique alphanumeric report number(s) assigned by the organization performing the report.

Block 9. Sponsoring/Monitoring Agency Name(s) and Address(es). Self-explanatory.

Block 10. Sponsoring/Monitoring Agency Report Number. (If known)

Block 11. Supplementary Notes. Enter information not included elsewhere such as: Prepared in cooperation with...; Trans. of...; To be published in.... When a report is revised, include a statement whether the new report supersedes or supplements the older report.

Block 12a. Distribution/Availability Statement. Denotes public availability or limitations. Cite any availability to the public. Enter additional limitations or special markings in all capitals (e.g. NOFORN, REL, ITAR).

DOD - See DoDD 5230.24, "Distribution Statements on Technical Documents."
DOE - See authorities.
NASA - See Handbook NHB 2200.2.
NTIS - Leave blank.

Block 12b. Distribution Code.

DOD - Leave blank.
DOE - Enter DOE distribution categories from the Standard Distribution for Unclassified Scientific and Technical Reports.
NASA - Leave blank.
NTIS - Leave blank.

Block 13. Abstract. Include a brief (Maximum 200 words) factual summary of the most significant information contained in the report.

Block 14. Subject Terms. Keywords or phrases identifying major subjects in the report.

Block 15. Number of Pages. Enter the total number of pages.

Block 16. Price Code. Enter appropriate price code (NTIS only).

Blocks 17. - 19. Security Classifications. Self-explanatory. Enter U.S. Security Classification in accordance with U.S. Security Regulations (i.e., UNCLASSIFIED). If form contains classified information, stamp classification on the top and bottom of the page.

Block 20. Limitation of Abstract. This block must be completed to assign a limitation to the abstract. Enter either UL (unlimited) or SAR (same as report). An entry in this block is necessary if the abstract is to be limited. If blank, the abstract is assumed to be unlimited.

UNCLASSIFIED

TABLE OF CONTENTS

	Page
LIST OF FIGURES.....	v
LIST OF TABLES	vii
I. INTRODUCTION: BACKGROUND AND PURPOSE.....	1
II. THE CAAM PREDICTOR.....	1
III. COMPARISON METHODOLOGY.....	2
IV. COMPARISON OF HIT PROBABILITIES AND ANALYSIS.....	3
V. CONCLUSIONS.....	11
REFERENCES.....	13
DISTRIBUTION LIST	15

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	



INTENTIONALLY LEFT BLANK.

LIST OF FIGURES

	Page
1. Flightpath 3	4
2. Flightpath 8	5
3. Flightpath 2	6
4. Flightpath 16	7
5. Flightpath 5	8

INTENTIONALLY LEFT BLANK.

LIST OF TABLES

	Page
1. The Flightpaths.....	3
2. Time of Flight Versus Range.....	3
3. Hit Probability Comparison: Fixed Gun	9
4. Hit Probability Comparison: Randomly Placed Gun	10
5. Hit Probability Comparison: Noisy Sensor	10

INTENTIONALLY LEFT BLANK.

A Comparison of Parabolic and Circular Arc Prediction

Joseph K. Wald (U.S. Army Ballistic Research Laboratory)

Harold H. Burke (U.S. Army Materiel Systems Analysis Activity)

I. INTRODUCTION: BACKGROUND AND PURPOSE

The ability of modern fixed wing aircraft and helicopters to perform evasive maneuvers while carrying out their missions has significantly degraded the performance capabilities of gun systems engaging these targets. These evasive tactics have motivated the initiation of programs to improve the effectiveness of conventional gun systems. One way to improve the effectiveness of a gun system engaging maneuvering targets is to increase its delivery accuracy. A new and different fire control solution using a Circular Arc Aimed Munition (CAAM) prediction concept has the capability of doing just that [1,2].

In this paper we present the results of a simulation study that investigated the difference in effectiveness (measured by hit probability) between the CAAM predictor and a standard conventional second order predictor, installed in a modern air defense gun, against a variety of flight-paths flown by maneuvering aircraft in actual field tests.

In section II, we introduce the CAAM predictor, noting how it differs from the standard (first order) linear and (second order) parabolic predictors; in section III, we describe the methodology used in the simulation study; in section IV, we present the results of the study; and in section V, we present our conclusions.

II. THE CAAM PREDICTOR

The purpose of the predictor in a gun's fire control system is to estimate the future position of the target, necessary information for the development of proper lead angles. Conventional linear prediction, described by the equation

$$\vec{p}_f = \vec{p}_p + \vec{v}_p t_f,$$

where \vec{p}_f is the future position of the target, \vec{p}_p its present position, \vec{v}_p its current velocity, and t_f the projectile's time of flight, clearly assumes that the target will be flying along a straight line, at least for the duration of the projectile's flight. Similarly, conventional parabolic prediction, described by the equation

$$\vec{p}_f = \vec{p}_p + \vec{v}_p t_f + (1/2) \vec{a}_p t_f^2,$$

where \vec{a}_p is the target's present acceleration, assumes that the target will be flying along a parabolic arc in the future.

The CAAM predictor makes the assumption that for at least one projectile time of flight (several seconds), an aircraft will fly in a circular arc of fixed radius. This seems to be a reasonable assumption since the laws of aerodynamics and the requirement to maintain a stable operating condition constrain the acceleration vector of the aircraft to remain more or less perpendicular to its velocity vector. In fact, modern fire/flight control systems constrain aircraft to maneuver in sustained (high acceleration) circular arcs during the ordnance delivery portion of the flight profile

[3,4,8]. Compared to straight line ordnance delivery, this tactic clearly increases survivability against engagement from an air defense gun equipped with a conventional linear or parabolic predictor. However, it is equally clear that this tactic conforms to the assumption underlying the CAAM concept, and thus should not offer quite as much improvement in survivability against a gun outfitted with a CAAM predictor. Other studies have shown that the CAAM concept will also give improved accuracy against ground targets [9].

The CAAM prediction concept is given by the equation

$$\vec{p}_f = \vec{p}_p + \vec{v}_p \gamma_v t_F + (1/2) \vec{a}_p \gamma_a t_F^2,$$

where the factors γ_v and γ_a , which account for the rotational motion of the aircraft maneuvering in a circular arc, are defined by the expressions

$$\gamma_v = 1 - (\Delta\theta)^2/6,$$

and

$$\gamma_a = 1 - (\Delta\theta)^2/12.$$

The term $\Delta\theta$ is equal to $|\vec{a}_{p_N}| t_F / |\vec{v}_p|$, the rotation rate of the aircraft (i.e., the magnitude of that component of the acceleration vector perpendicular to the velocity vector divided by the magnitude of the velocity vector) multiplied by the time of flight. This is just the amount of circular arc that the aircraft moves through during the time of flight of the projectile.

III. COMPARISON METHODOLOGY

The vehicle that was used for the comparison of the two predictors was the Modern Gun Effectiveness Model (MGEM) [5]. MGEM is a time sequenced, Monte Carlo simulation of an engagement between a "state of the art" air defense gun and a single aircraft target. The aircraft target is just that, a target. It does not attempt to attack the air defense gun; neither does it alter its flightpath in response to being fired upon. This methodology tends to give overly optimistic estimates of the performance of an air defense gun in a tactical situation, but is appropriate for a comparative study such as the present one.

In MGEM, the flightpath of the target is fed into a sensor model that provides noisy position information to the fire control computer. A Kalman filter computes smoothed estimates of position, velocity, and acceleration for the target. These estimates, together with the ballistic characteristics of the ammunition, allow the fire control computer to predict the position of the target one time of flight in the future. Aiming commands are issued and bullets are flown out to intercept the target. Since there are many error sources modeled in the steps of this procedure, the bullets will, in general, not pass through the center of the target. Therefore, based on the path of each bullet and the size of the target, a determination is made as to whether that bullet hit the target. This process is repeated for as many Monte Carlo replications as desired, with the resulting probability of hit being simply the fraction of replications in which at least one bullet hit the target. The amount of damage done by a bullet can also be computed, although for our purposes only the probability of hit was calculated.

In the present study we focused our attention on the prediction problem. Since the standard parabolic predictor was already resident in MGEM, we needed only install the CAAM predictor described above as a new option in the prediction subroutine. We then selected several flightpaths from the Library of Digitized Flightpaths [6] in residence at the Ballistic Research Laboratory, and used them, in the manner described below, to compare the two predictors.

The flightpaths in the Library of Digitized Flightpaths were produced not from a mathematical model, but rather from actual profiles flown during technical and operational tests conducted by the U. S. Army in New Mexico and California. The noise superimposed on the flightpaths during the data collection process was removed by an optimal double sweep Kalman smoothing technique [7] that simultaneously produces target positions, velocities, and accelerations. Table 1

contains a list of the flightpaths chosen for the study. These flightpaths are also depicted in figures 1 through 5.

TABLE 1. The Flightpaths.	
Flightpath Number	Flightpath Description
3	"straight penetrator"
8	"general turn"
2	"pop-up, turn, and dive"
16	"low level attack"
5	"jinking penetrator"

The flightpaths are listed in order of increasing severity of maneuver. The peak accelerations of flightpath 3 are about 10 meters per second per second, while the peak accelerations for flightpath 5 are about six times that size. It would be desirable to compare the performance of the two predictors against a sustained high acceleration maneuver, but no such missions were flown during the field tests from which these flightpaths were taken. The sensitivity of sophisticated fire control systems to small "real world" variations in a flightpath makes it dangerous to draw conclusions about effectiveness when using a mathematically derived flightpath. So, as appealing as the idea was, we resisted the temptation to use an analytically produced, high acceleration, circular flightpath in this study.

Flightpaths 3 and 5 would typically be encountered by an air defense gun during the ingress and egress portions of an aircraft's mission, with flightpaths 2, 8, and 16 typical of "vicinity of target" maneuvers. Flightpath 3 was included only to verify that use of the CAAM predictor does not result in a degradation of performance against nonmaneuvering targets, and was therefore included only in table 4.

For simplicity, we chose the presented area of the target to be 10 square meters when viewed from each of the cardinal directions. The maximum intercept range was chosen to be 4000 meters, with the gun firing a series of one second (10 round) bursts with an interburst waiting period of 0.5 seconds while the target was in range. The time of flight of the bullets as a function of range appears in table 2.

TABLE 2. Time of Flight Versus Range.	
Range (meters)	Time of Flight (seconds)
500	0.43
1000	0.91
1500	1.43
2000	2.00
2500	2.63
3000	3.33
3500	4.12
4000	5.00

IV. COMPARISON OF HIT PROBABILITIES AND ANALYSIS

We discovered as a result of our initial computer runs that due to the very detailed nature of the modeling of the fire control system, hit probability was extremely sensitive to the geometric relationship between the air defense gun and the flightpath. The hit probabilities appearing in

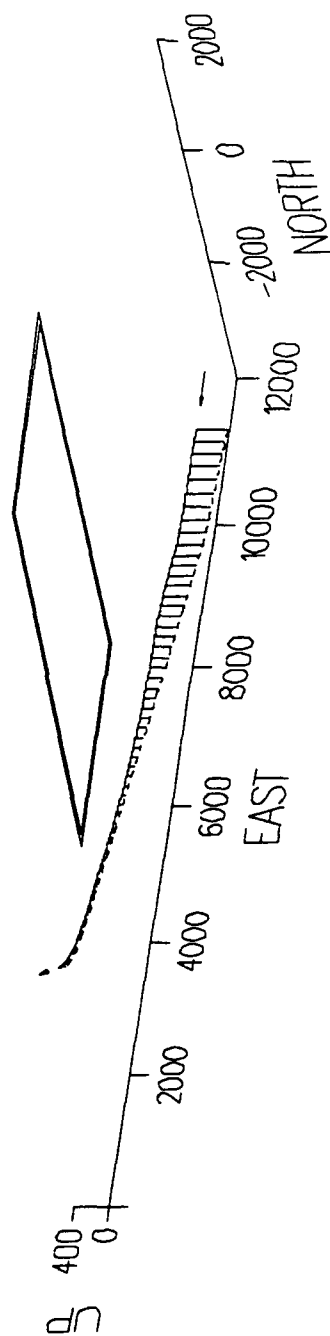


Figure 1. Flightpath 3

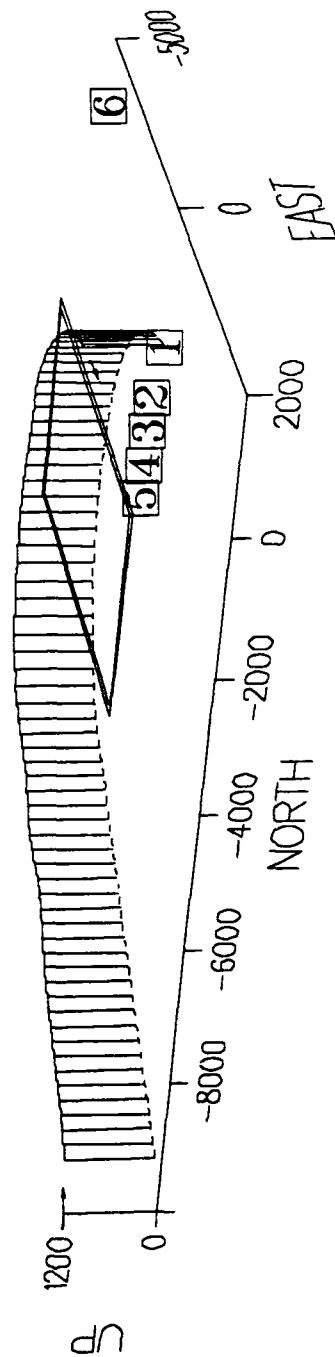


Figure 2. Flightpath 8

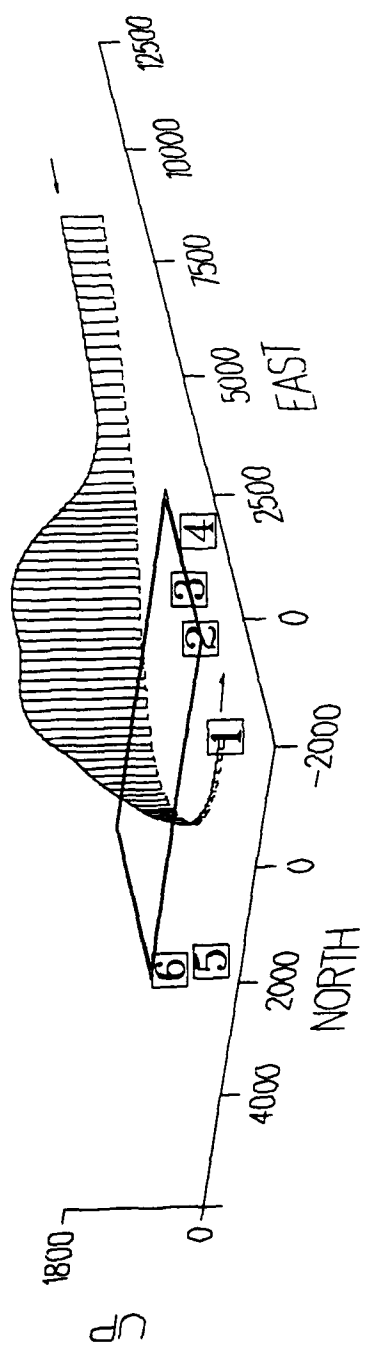


Figure 3. Flightpath 2

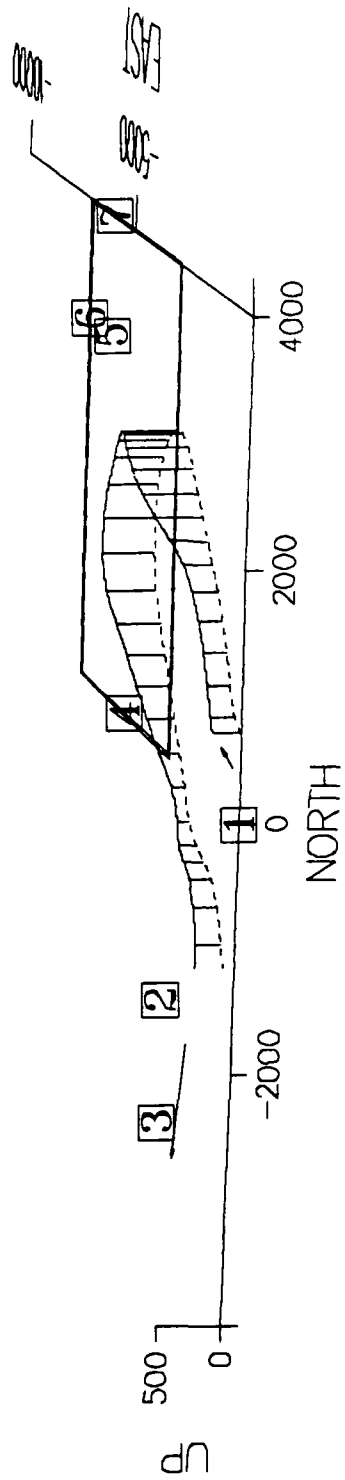


Figure 4. Flightpath 16

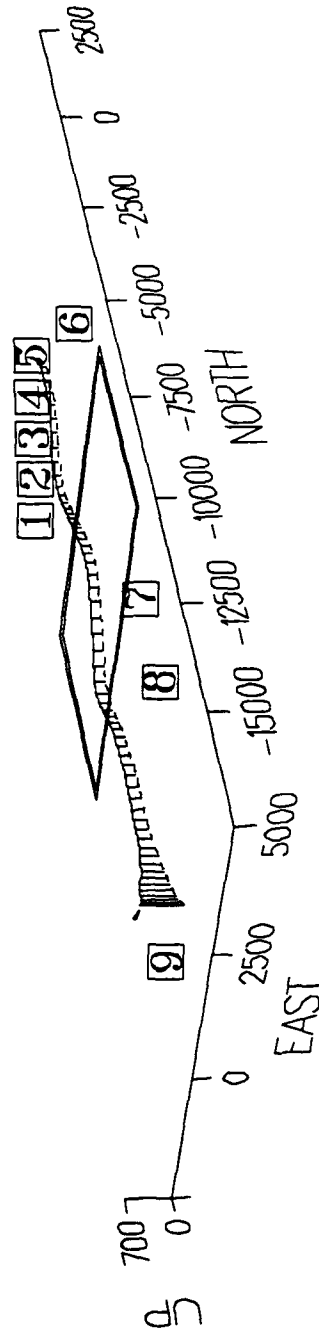


Figure 5. Flightpath 5

table 3 show that varying the location of the gun relative to the flightpath causes a wide variation in the relative performance between the two predictors. These results were based on 100 Monte Carlo replications. The gun locations are indicated graphically in figures 2 through 5.

TABLE 3. Hit Probability Comparison: Fixed Gun.			
Flightpath	Position Number	Parabolic Prediction	CAAM Prediction
8			
	1	.95	.98
	2	.99	.96
	3	.96	.95
	4	.80	.78
	5	.71	.68
	6	.01	.04
2			
	1	1.00	1.00
	2	.67	.75
	3	.38	.40
	4	.14	.13
	5	.74	.71
	6	.53	.50
16			
	1	.67	.68
	2	.54	.53
	3	.12	.15
	4	.72	.79
	5	.25	.32
	6	.04	.03
5			
	1	.05	.08
	2	.11	.21
	3	.20	.31
	4	.68	.72
	5	.98	.96
	6	.08	.14
	7	.22	.32
	8	.36	.61
	9	.69	.65

We avoided this dependence of results on the (rather arbitrary) choice of gun location by varying the position of the gun in each replication, and increased to 400 the number of Monte Carlo replications that were run for each predictor against each flightpath. The gun was randomly placed in a two dimensional rectangular "box" as indicated in figures 1 through 5. This approach increases the realism of the simulation in that it is to be expected that the geometric relationship between the aircraft and the gun will change (perhaps drastically) from one engagement to another on a real battlefield. The location and shape of the box was chosen to cause most engagements to occur along the part of the flightpath that contains the most severe maneuvers of

the target and to allow the gun to engage the target at all ranges. A summary of the results of these runs appears in table 4.

TABLE 4. Hit Probability Comparison: Randomly Placed Gun.		
Flightpath	Parabolic Prediction	CAAM Prediction
3	0.92	0.92
8	0.65	0.68
2	0.65	0.71
16	0.66	0.71
5	0.48	0.54

As mentioned in section III, flightpath 3 was included only as a "control", i.e. to insure that against nonmaneuvering targets the CAAM predictor does not degrade the effectiveness of the gun system. The results here verify that assertion. Note that for 400 Monte Carlo replications, the standard deviation of the hit probability distribution is less than or equal to 0.025. Therefore, considering the differences in hit probabilities for the four maneuvering flightpaths (differences that are consistently in favor of the CAAM predictor), we can say with at least 80 % confidence for flightpath 8 and greater than 90 % confidence for flightpaths 2, 16, and 5, that these differences are not due just to the stochastic nature of the model.

These results lead one to the conclusion that there are more "segments" of these flightpaths that are better approximated by circular arcs than by parabolic arcs. We assert that for any flightpath containing a long circular maneuver at high acceleration, the CAAM predictor will prove superior to the parabolic predictor. This effect is rather mild in flightpath 8, since the relatively low acceleration (about 20 meters per second per second) corresponds to a circle of large radius. At any point on such a circle, the corresponding tangent parabola diverges rather slowly. Thus the error in miss distance caused by parabolic prediction will not be too serious. For a much higher acceleration, however, the circle will be "tighter", i.e. it will have a much smaller radius of curvature, and the parabola will be a much worse approximation than the circle for the same projectile time of flight.

Note also that while modern attack helicopters fly at much lower speeds than fixed wing aircraft, they can turn in much tighter circles. Therefore the CAAM concept may be applicable against these targets as well. Helicopters were not included in the study due to the lack of available highly maneuvering helicopter flightpaths.

The advantage enjoyed by the CAAM concept over conventional parabolic prediction can be negated if other error sources in the gun system grow too large. To investigate this effect, we increased the standard deviation of angular noise errors in the sensor model from 0.0015 radians (the value used in the runs documented in tables 3 and 4) to 0.0050 radians, and repeated the above experiment (with the randomly placed gun) with flightpaths 8, 2, 16, and 5. The results appear in table 5. The value of 0.0015 radians is appropriate for an automated tracking device or possibly for a man/machine combination, while the 0.0050 value may be more appropriate for a strictly human tracker.

TABLE 5. Hit Probability Comparison: Noisy Sensor.		
Flightpath	Parabolic Prediction	CAAM Prediction
8	0.42	0.43
2	0.53	0.50
16	0.51	0.52
5	0.39	0.40

As expected, the performance of both predictors decreased. Now, however, the performances of the two predictors are statistically indistinguishable. The reason for this becomes apparent when one considers the expressions

$$\vec{v}_p \gamma_v t_F ,$$

and

$$(1/2) \vec{a}_p \gamma_a t_F^2 ,$$

the "velocity" and "acceleration" terms from the CAAM prediction equation. When the sensor is degraded, so are the present velocity and acceleration estimates of the target. Since γ_v and γ_a , respectively, are multiplied by these estimates, the accuracy of the product is constrained by the accuracy of the least accurate factor. In this case, the noisy state estimates "overwhelm" the more subtle differences between predictors.

V. CONCLUSIONS

1. Compared to conventional parabolic prediction, CAAM provides a modest but consistent improvement in delivery accuracy against aircraft executing (available) "real life" maneuvering flightpaths. However, its real value should be seen when it is applied against aircraft flying modern sustained high acceleration circular arc ordnance delivery maneuvers. Whenever we can get high resolution, high data rate (about 20 Hertz), "real life" target position data for such maneuvers, we intend to continue the comparison between parabolic and CAAM prediction. Such stringent restrictions on the flightpath data are necessary, since a model of the sophistication of MGEM is required for the analysis of these rather subtle phenomena.
2. In order to get full benefit from CAAM prediction it is necessary to have a rather accurate target tracking system. A good automatic tracking device or a human aided tracker would probably qualify, but it is doubtful that an unaided human could track highly maneuvering modern fixed wing aircraft accurately enough for this purpose.
3. The benefits of CAAM prediction are available at relatively low cost. In an existing weapon system, a new computer card is necessary, while in a new system, there will be no additional cost in adding CAAM prediction during the design of the fire control system.

INTENTIONALLY LEFT BLANK.

REFERENCES

1. Burke, H. H.; Perkins, T. R., **U. S. Patent No. 4794235**, Nonlinear Prediction for Gun Fire Control Systems, 27 December, 1988.
2. Burke, H. H., **A Gun Fire Control System Predictor Concept for Improving Performance Against Maneuvering Targets (U)**, U. S. Army Materiel Systems Analysis Activity Technical Report TR-342, November, 1981. UNCLASSIFIED
3. Russ, R.D., **No Sitting Ducks**, Air Force Magazine, July, 1988.
4. Bennett, W.S., **AFTI/F-16 Development and Integration Program AMAS Phase, Volume 1, Program Summary (U)**, AFWAL-TR-88-3013, August, 1988. UNCLASSIFIED
5. Lufkin, B. M., **The Air Defense Modern Gun Effectiveness Model (MGEM) (U)**, U. S. Army Materiel Systems Analysis Activity Technical Report TR-360, June, 1982. UNCLASSIFIED
6. Wald, J. K., **A Library of Digitized Flightpaths (U)**, U. S. Army Ballistic Research Laboratory Technical Report BRL-TR-3001, June, 1989. UNCLASSIFIED
7. Scheder, Robert A., **A Computer Program for Double Sweep Optimal Smoothing (U)**, U. S. Army Materiel Systems Analysis Activity Technical Report TR-246, January, 1979. UNCLASSIFIED
8. Murphy, W. J., et al, **Tactical Flight Management Exploratory Development Program (U)**, AFWAL-TR-84-3023, April 1984. UNCLASSIFIED
9. Burke, H. H., **White Paper: Circular Arc Aimed Munitions (CAAM) and the CAS/BAI Mission (U)**, JTCG Methodology Subgroup Meeting, NPGS, August 16, 1989. UNCLASSIFIED

INTENTIONALLY LEFT BLANK.

No of Copies	Organization
(Unclass., unlimited) 12	Administrator
(Unclass., limited) 2	Defense Technical Info Center
(Classified) 2	ATTN: DTIC-DDA Cameron Station Alexandria, VA 22304-6145
1	HQDA (SARD-TR) WASH DC 20310-0001
1	Commander US Army Materiel Command ATTN: AMCDRA-ST 5001 Eisenhower Avenue Alexandria, VA 22333-0001
1	Commander US Army Laboratory Command ATTN: AMSLC-DL Adelphi, MD 20783-1145
2	Commander Armament RD&E Center US Army AMCCOM ATTN: SMCAR-MSI Picatinny Arsenal, NJ 07806-5000
2	Commander Armament RD&E Center US Army AMCCOM ATTN: SMCAR-TDC Picatinny Arsenal, NJ 07806-5000
1	Director Benet Weapons Laboratory Armament RD&E Center US Army AMCCOM ATTN: SMCAR-CCB-TL Watervliet, NY 12189-4050
1	Commander US Army Armament, Munitions and Chemical Command ATTN: SMCAR-ESP-L Rock Island, IL 61299-5000
1	Commander US Army Aviation Systems Command ATTN: AMSAV-DACL 4300 Goodfellow Blvd. St. Louis, MO 63120-1798
1	Director US Army Aviation Research and Technology Activity Ames Research Center Moffett Field, CA 94035-1099

No of Copies	Organization
1	Commander US Army Missile Command ATTN: AMSMI-RD-CS-R (DOC) Redstone Arsenal, AL 35898-5010
1	Commander US Army Tank-Automotive Command ATTN: AMSTA-TSL (Technical Library) Warren, MI 48397-5000
1	Director US Army TRADOC Analysis Command ATTN: ATAA-SL White Sands Missile Range, NM 88002-5502
(Class. only) 1	Commandant US Army Infantry School ATTN: ATSH-CD (Security Mgr.) Fort Benning, GA 31905-5660
(Unclass. only) 1	Commandant US Army Infantry School ATTN: ATSH-CD-CSO-OR Fort Benning, GA 31905-5660
1	Air Force Armament Laboratory ATTN: AFATL/DLODL Eglin AFB, FL 32542-5000
	<u>Aberdeen Proving Ground</u> Dir, USAMSAA ATTN: AMXSY-D AMXSY-MP, H. Cohen Cdr, USATECOM ATTN: AMSTE-TO-F Cdr, CRDEC, AMCCOM ATTN: SMCCR-RSP-A SMCCR-MU SMCCR-MSI Dir, VLAMO ATTN: AMSLC-VL-D

No of
Copies Organization

- 1 Commander
US Army Laboratory Command
ATTN: AMSLC-PI, J. Spellman
2800 Powdermill Road
Adelphi, MD 20783-1145
- 1 Commander
Armament RD&E Center
US Army AMCCOM
ATTN: SMCAR-FSF, J. Lehman
Picatinny Arsenal, NJ 07806-5000
- 1 Commander
US Army Aviation Systems Command
ATTN: AMSAV-BA, A. Kassos
4300 Goodfellow Blvd.
St. Louis, MO 63120-1798
- 1 Air Force Armament Laboratory
ATTN: AFATL/ENY, Dr. S. Turner
Eglin AFB, FL 32542-5000
- 2 WRDC/FIVS/SURVIAC
ATTN: Mr. K. Seibert (2 cys)
Wright-Patterson AFB, OH 45433-6553
- 1 Director
Flight Dynamics Laboratory
ATTN: WRDC/FIV, J. Sparks
Wright-Patterson AFB, OH 45433-6553
- 1 WRDC/FIG/X
ATTN: LT M. Beierle
Wright-Patterson AFB, OH 45433-6553
- 2 Commander
Naval Weapons Center
ATTN: Code 3181, D.H. Hall
Code 31812, C. Knecht
China Lake, CA 93555-6001
- 1 Commander
Naval Air Systems Command
JTCG/AS Central Office
ATTN: AIR-5164J, LCDR T. Maynard
Washington, DC 20361-5160
- 1 Director
US Army Foreign Science & Technology
Center
ATTN: AIFREB, D. Fitzsimmons
220 Seventh St., N.E.
Charlottesville, VA 22901-5396
- 1 AFWAL/FOCX
ATTN: MAJ Drew
Wright-Patterson AFB, OH 45433-6553

No of
Copies Organization

- Aberdeen Proving Ground
- 7 Dir, USAMSAA
ATTN: AMXSY-J, A. LaGrange
AMXSY-C, A.H. Reid
AMXSY-AD, J. Meredith
AMXSY-AA, J. Lauzau/J. Hennessy
AMXSY-CS, P. Beavers/H. Burke

USER EVALUATION SHEET/CHANGE OF ADDRESS

This Laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers to the items/questions below will aid us in our efforts.

1. BRL Report Number BRL-TR-3091 Date of Report MARCH 1990
2. Date Report Received _____
3. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) _____

4. Specifically, how is the report being used? (Information source, design data, procedure, source of ideas, etc.) _____

5. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. _____

6. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) _____

CURRENT
ADDRESS

Name

Organization

Address

City, State, Zip Code

7. If indicating a Change of Address or Address Correction, please provide the New or Correct Address in Block 6 above and the Old or Incorrect address below.

OLD
ADDRESS

Name

Organization

Address

City, State, Zip Code

(Remove this sheet, fold as indicated, staple or tape closed, and mail.)

-----FOLD HERE-----

DEPARTMENT OF THE ARMY

Director

U.S. Army Ballistic Research Laboratory

ATTN: SLCBR-DD-T

Aberdeen Proving Ground, MD 21005-5066

OFFICIAL BUSINESS



**NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES**

BUSINESS REPLY MAIL

FIRST CLASS PERMIT No 0001, APG, MD

POSTAGE WILL BE PAID BY ADDRESSEE

Director

U.S. Army Ballistic Research Laboratory

ATTN: SLCBR-DD-T

Aberdeen Proving Ground, MD 21005-9989

-----FOLD HERE-----